
























	Standard	Result
 Size	EN ISO 24342	See separate table
 Thickness	EN ISO 24346	4.5 mm
 Wear layer	EN ISO 24340	0.55 mm
Surface treatment		PU coating
Guarantee¹	Light industrial Commercial Residential	15 years 15 years 20 years
 Bevelled edge		No
 Mass per unit area	EN ISO 23997	7470 g/m ²
 Standards	EN 649/EN ISO 10582	Pass
 Classification	EN 685/EN ISO 10874 - Light industrial EN 685/EN ISO 10874 - Commercial EN 685/EN ISO 10874 - Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
 Reaction to fire	EN 13501-1	B _{fl} -s1
 Staining resistance	EN ISO 26987/EN 423	Excellent
 Light fastness	EN ISO 105-B02	Pass (≥ 7)
 Abrasion resistance	EN 649 EN ISO 10582	Group T Type 1
 Flexibility	EN ISO 24344	Pass
 Dimensional stability	EN 434/EN ISO 23999	Pass (≤ 0.10%)
 Acoustic impact noise reduction	EN ISO 717-2/EN ISO 140-8	ΔL _w = 13 dB
 Indentation - residual	EN 433/EN ISO 24343-1	Pass (≤ 0.1 mm)
 Castor chair continuous use	EN 425/ISO 4918	Pass
 Thermal resistance	ISO 8302	0.0245 m ² K/W Suitable for underfloor heating. Max 27°C
 Slip resistance²	EN 13893 DIN 51130	DS R10
 Light Reflectance Value (LRV)	BS 8493:2008+A1:2010	See separate table
 Adhesive		Please install according to our installation instructions.
 Environmental	Indoor Air Comfort Floorscore SCS-EC10.3-2014 v4.0 ISO 14001 / ISO 9001	Gold certification Compliant low emitting VOC emissions. Indoor air quality certified; Compliant low emitting VOC emissions. Manufactured to quality and environment management systems standard
 Recycling		Suitable
 Phthalate free		Yes

¹ Subject to terms. Please see our website.


² Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

For more information:

UK: 01386 820110 | ROI: 01 6569887

Email: info@palioflooring.com

Visit: www.palioflooring.com

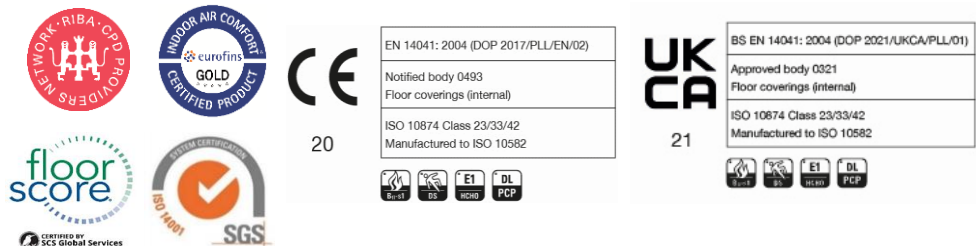



Product Code	Size		Box Quantity		Slip Resistance DIN 51130	LRV	
	mm	inches	m ²	Pieces			
Wood Designs	LLP142	1050.0 x 250.0	41.34" x 9.84"	3.150	12 Planks	R10	26
	LLP143	1050.0 x 250.0	41.34" x 9.84"	3.150	12 Planks	R10	20
	LLP144	1050.0 x 250.0	41.34" x 9.84"	3.150	12 Planks	R10	34
	LLP145	1050.0 x 250.0	41.34" x 9.84"	3.150	12 Planks	R10	27
	LLP146	1050.0 x 250.0	41.34" x 9.84"	3.150	12 Planks	R10	27
	LLP147	1050.0 x 250.0	41.34" x 9.84"	3.150	12 Planks	R10	38
	LLP148	1050.0 x 250.0	41.34" x 9.84"	3.150	12 Planks	R10	21
	LLP149	1050.0 x 250.0	41.34" x 9.84"	3.150	12 Planks	R10	46
	LLP150	1050.0 x 250.0	41.34" x 9.84"	3.150	12 Planks	R10	25
	LLP151	1050.0 x 250.0	41.34" x 9.84"	3.150	12 Planks	R10	9
Stone Designs	LLT208	500.0 x 610.0	19.69" x 24.02"	3.050	10 Tiles	R10	66
	LLT209	500.0 x 610.0	19.69" x 24.02"	3.050	10 Tiles	R10	44
	LLT210	500.0 x 610.0	19.69" x 24.02"	3.050	10 Tiles	R10	23
	LLT211	500.0 x 610.0	19.69" x 24.02"	3.050	10 Tiles	R10	10